

ALEXGROUT OC



High Strength, Non-Shrink, Cementitious Grout

Description

ALEXGROUT OC is a ready to use, pre packed product In powder form. Non shrinkage and non metallic Cementations grout with non staining, high Strength, high fluidity characteristics, formulated from shrinkage compensated material and natural aggregates binder.

Uses

- Grouting under general structure supports(base plates for hungers, steel shed,.....etc)
- Repair of damage concrete where a highly compressive strength is required.
- Grouting under equipments, machinery& Column base plates and crane rails
- Anchoring precast panels.

Advantages

- Early strength development
- Non shrinkage(Shrinkage compensation)
- Free from chlorides and aggressive materials that may lead to corrosion of steel base of structures or machines
- High bond strength to steel and concrete
- Highly fluid and extremely peaceable for easy Field use.
- No segregation or bleeding at high fluidity.

Standard

According to ASTM C1107 grade A

Surface preparation



- Remove all lose material from the surface such as oil,dust,paint,curing compound or other contaminated material that decrease the adhesion force.
- Confirm both of the strengthened and the sealed of the shuttering to prevent from leakage during casting.
- Saturated the old surface by water.
- Remove all excess water before casting the grout.

Properties

Compressive strength N/mm²	Flowable at 3.75 lit/bag
1 Day	18-20 N/mm ²
3Day	25-28 N/mm ²
7 Day	35-40 N/mm ²
28 Day	55-60 N/mm ²
Density	2100kg/m ³
Free expansion	2-4%
Restrained expansion	0-0.4%

Guide to application

Typical applications:

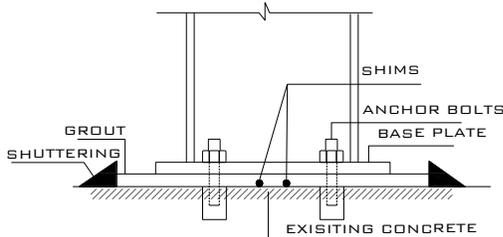

Mixing:

- Use from 3.5 to 4.0 lit of potable water to 25 kg.bag depending on consistency required. First add the required quantity of water and then **ALEXGROUT OC** dry powder As the mixer operates, mix for 3 min then place the grout, insure the casting from only one side to avoid air entrainment, and ensure complete filling.

-Do not add sand or gravel on site & use

mortar mixer or mixing drill according to the quantity required.

- A rod may be used to help in placement.

- Keep the head box to assure a continuous flow.

- For big volume use grout pump.

Coverage:

The approximate yield per 25 kg bag At each consistency is 12.0 lit for trowelable and 13.0 lit for flowable.

Storage:

Store out of direct sunlight, clear of the ground on pallets protected from rain fall.

Protect from extremes of temperatures. Store in shaded area.

Packing:

Is supplied in 25 Kg Bags.

Shelf life:

Up to 12 months if stored in unopened containers according to the manufactured instructions.

Safety precautions:

- Non toxic,non flammable.
- Avoid contact with eyes, mouth, and skin.
- Treat splashes to eyes and contact medical assistant after washing by water.

Guarantee:

All precaution is taken in manufacture of each product to comply with the standard of each material.

The data sheet for each product for information only and may be corrected and no liability is accepted for it.

The results may have variation because the method of their use condition under which they are applied cannot be anticipated.

Technical Service:

For any technical advice for using the **ALEXCHEM** contact the technical office.

HEAD OFFICE:

12 Ibn saad,45 Miami ,Alexandria
Tel:03-5885431 Fax:03-5885253
mob: 01155444400
Website : www.alexchem.net
Email : info@alexchem.net

FACTORY:

EINahda- Amrya -Alexandria
Tel/Fax:03-4770313